



VERIFLO

ISO 9001 Certified

Veriflo Division

Instrument/Analyzer Digest

Regulators, Valves & Flow Controllers

Catalog 4500

Revised, August 2000



Parker
Instrumentation



VERIFLO
ISO 9001 Certified

Table of Contents

Veriflo Division	1
New Product Spotlight	2,3
Pressure Reducing Regulators	4-6
<i>Single Stage Regulators</i>	4
<i>ChangeOver System</i>	5
<i>Two Stage Regulators</i>	6
Vaporizing Regulators	6
Back Pressure Regulators	6
Valves	7-9
<i>Diaphragm Valves</i>	7-8
<i>Checks Valves, Relief Valves</i>	9
<i>Excess Flow Valves</i>	9
Flow Controllers	10
Product Index	11
Veriflo On-line	12
Parker Hannifin Corporation	13

The Division



Veriflo Division is a leading manufacturer of precision valves, regulators and transducers for the control and application of liquids and gases used in chemical and petrochemical industries as well as in the fabrication of semiconductor ICs.

A leading manufacturer of precision valves and regulators

The Instrumentation Group of Parker Hannifin specializes in high quality, critical flow components for worldwide process instrumentation, ultra-high-purity, medical, analytical and biopharmaceutical applications.

The Instrumentation Group has ten manufacturing plants and over 300 authorized distributor locations worldwide to provide local inventory and technical support. Key markets for the Instrumentation Group include: Chemical Process, Power Generation, Oil and Gas Exploration, Semiconductor Manufacturing, Biomedical, and Analytical Equipment.

Veriflo has been responding to industry change through innovative engineering and manufacturing for more than 85 years. Veriflo's ISO 9001 registration at its Richmond, California plant in May 1995 and its ISO 9002 certification at its Carson City, Nevada facility in July 1996 confirm the division's commitment to quality and excellence as recognized by the international community.

In an effort to meet growing global industry demands, Veriflo recently expanded its manufacturing capacity and implemented a Continuous Flow Manufacturing philosophy. Part of Veriflo's overall physical expansion included the addition of two state-of-the-art Class 10 Clean Rooms at its Richmond, California, semiconductor component manufacturing facility.

Veriflo's proven leadership is deeply rooted in customer service and the ability to develop high-quality products for the various global markets it serves.

Veriflo's technical superiority is supported by patents allowing the division to deliver innovative state-

Veriflo's proven leadership is deeply rooted in customer service

of-the-art products to its customers. Veriflo has manufacturing facilities in Richmond, California, Carson City, Nevada, and Belleville, New Jersey that produce products for the following applications:

- *Instrument/Analyzer*
- *Pharmaceutical*
- *Semiconductor/High Purity*

Note: For more information on Veriflo Division visit its web site (www.veriflo.com). For more information on Parker Hannifin Corporation and the Instrumentation Group visit Parker's web site (www.parker.com).





OPERATING CONDITIONS

Maximum inlet: 4000 psig (276 barg)
 Outlet : 1-10 psig (.7 barg), 1-30 psig (2 barg), 1-60 psig (4 barg),
 2-100 psig (7 barg), 2-250 psig (17 barg)

FLOW CAPACITY

Standard: C_v .06
 Optional: C_v .02, .15 (Semi Flow Coefficient Test # F-32-0998)

INTERNAL VOLUME

8.1 cc

TEMPERATURE

PCTFE: -40°F to 150°F (-40°C to 66°C)
 PEEK™: -40°F to 275°F (-40°C to 135°C)
 Vespel®: -40°F to 500°F (-40°C to 260°C)

**IR6000 Series Two Stage Regulator
 Internally Threadless Design**

The **NEW** IR6000 Series is an internally threadless pressure regulator designed for pressure reducing instrument/analyzer applications including cylinder and calibration gases.

The IR6000 is a high pressure regulator that can be ordered with a variety of options to meet a range of system design requirements.

- Unique patented compression member loads the seat to the body without requiring a threaded nozzle
- Selection of seat materials for media compatibility and temperature applications
- Meets NACE standard MR0175
- Compression member for low internal volume
- Fully swept design
- Internally threadless seat design to promote long seat life
- Convoluted, Hastelloy C-22® diaphragm provides high corrosion resistance and increases cycle life



OPERATING CONDITIONS

Maximum inlet: 4000 psig (276 barg)
 Outlet : 1-10 psig (.7 barg), 1-30 psig (2 barg), 1-60 psig (4 barg),
 2-100 psig (7 barg), 2-250 psig (17 barg), 5-500 psig (35 barg)

FLOW CAPACITY

Standard: C_v .06
 Optional: C_v .02, .15 (Semi Flow Coefficient Test # F-32-0998)

INTERNAL VOLUME

4.0 cc

TEMPERATURE

PCTFE: -40°F to 150°F (-40°C to 66°C)
 *PEEK™: -40°F to 275°F (-40°C to 135°C)
 *Vespel®: -40°F to 500°F (-40°C to 260°C)

*Temperature ranges are not available in Brass body

**IR4000 Series High Pressure Regulator
 Internally Threadless Design**

The **NEW** IR4000 Series is an internally threadless pressure regulator designed for instrument/analyzer and semiconductor applications.

Industrial applications include gas management in refineries and process analyzer systems. Semiconductor applications for use on general purpose gas management (Air, Condensed Dry Air (CDA), and Plant Nitrogen).

The IR4000 is a high pressure regulator that can be ordered with a variety of options to meet a range of system design requirements.

- Unique patented compression member loads the seat to the body without requiring a threaded nozzle
- Selection of seat materials for media compatibility and temperature applications
- Meets NACE standard MR0175
- Compression member for low internal volume
- Fully swept design
- Internally threadless seat design to promote long seat life
- Convoluted, Hastelloy C-22® diaphragm provides high corrosion resistance and increases cycle life



NPR4000 Series Negative Pressure Regulator

Parker Hannifin Corporation's Veriflo Division introduces the NPR4000 regulator for applications involving negative delivery pressures with low pressure gas sources.

This new regulator is specifically designed to regulate negative pressures down to -26 inHg vacuum (100 Torr). Typical applications include the delivery of low pressure gases from liquid sources such as WF₆, BCL₃.

- Internal threadless design
- Consistently maintains outlet set point
- Fluid media: corrosive and non-corrosive gases
- Metal-to-metal, diaphragm-to-body seal with Viton® O-ring backup

OPERATING CONDITIONS

Maximum inlet: 250 psig (17 barg)
 Outlet: 100 torr to 10 psig (-26 in Hg to .7 barg)

FLOW CAPACITY

Standard: C_v .06
 Optional: C_v .02, .15 (Semi Flow Coefficient Test # F-32-0998)


INTERNAL VOLUME

4.0 cc

TEMPERATURE

PCTFE: -40°F to 150°F (-40°C to 66°C)

Vaporizing Regulator

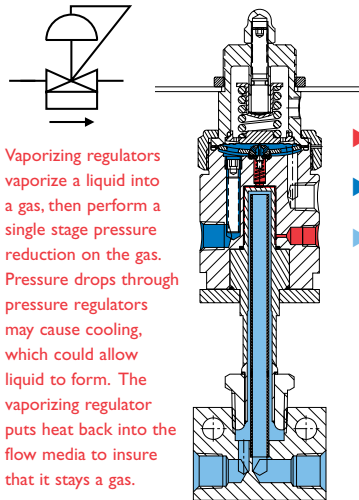

Vaporizing regulators vaporize a liquid into a gas, then perform a single stage pressure reduction on the gas. Pressure drops through pressure regulators may cause cooling, which could allow liquid to form. The vaporizing regulator puts heat back into the flow media to insure that it stays a gas.

AVR3 and AVR4 Series Pressure Reducing Regulator Electrically and Steam Heated Design



The **NEW** AVR3 and AVR4 Series steam and electrically heated vaporizing pressure reducing regulators are designed to heat and/or vaporize a gas or liquid sample before entering an analyzer system. The design allows easy cleaning of the heating element.

- Ultra Low internal volume
- Standard Hastelloy C22® diaphragm for superior strength and corrosion resistance
- Convuluted diaphragm provides outlet pressure stability with changes in flow
- Integral diaphragm stop provides additional safety measure
- Meets NACE standard MR0175
- CSA approved, Cenelec certified (Pending)
- Field serviceable heat transfer element

OPERATING CONDITIONS

Max Inlet Pressure : 3500 psig (241 barg)
 Outlet pressure: 1-10 psig (.07-.7 barg), 1-30 psig (.07-2 barg),
 1-60 psig (.07-4 barg), 2-100 psig (.14-7 barg), 3-250 psig (.2-17 barg),
 5-500 psig (.3-34.5 barg)

FLOW CAPACITY

C_v 0.06 Nominal

INTERNAL VOLUME


High Pressure Inlet 0.57 cc

TEMPERATURE

40°F to 500°F (-40°C to 260°C)


Pressure Reducing Regulators

Single Stage



▶ Outlet
▶ Inlet

This device is used to reduce a high pressure, supply pressure or inlet pressure in one stage to a low pressure. The low pressure side may also be called: low pressure, reduced pressure, control pressure, delivery pressure, downstream side or outlet pressure. Single stage regulators generally are preferred where there is little inlet pressure variability or where some outlet pressure variability is acceptable (see supply pressure effect specification on our product literature).

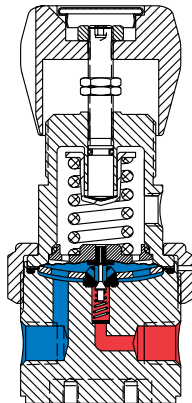

HFR900 Series High Flow Pressure Regulator

OPERATING CONDITIONS

Inlet: 500, 200 psig (35, 14 barg)
Outlet: 1-30, 2-75, 5-150 psig
(.06-2, .1-6, .3-10 barg)

FLOW CAPACITY

$C_v = 0.85$

INTERNAL VOLUME

38 cc

TEMPERATURE

-40°F to 150°F (-40°C to 66°C)

- 316L Stainless steel construction
- High flow



MIR700 Series Compact Single Stage Regulator

OPERATING CONDITIONS

Inlet: 3000 psig (207 barg)
Outlet: 0-15, 30, 100, 200 psig
(1, 2, 7, 14 barg)

FLOW CAPACITY

$C_v = .02$

INTERNAL VOLUME

3.9 cc

TEMPERATURE

-40°F to 150°F (-40°C to 66°C)

- Brass or 316L Stainless Steel construction
- Compact size



APR3 Series Pressure Reducing Regulator

OPERATING CONDITIONS

Inlet: 3500 psig (241 barg)
Outlet: 0-5, 30, 60, 100
(0.3, 2, 4, 7 barg)

FLOW CAPACITY

$C_v = 0.02$, (optional .2)

INTERNAL VOLUME

13.8 cc

TEMPERATURE

-40°F to 150°F (-40°C to 66°C)

- 316L stainless steel or Hastelloy®
- Standard Hastelloy C22® diaphragm
- Oversized diaphragm provides more pressure sensitive adjustments



959TDR Series High Pressure Tied Diaphragm Regulator

OPERATING CONDITIONS

Inlet: 3500 psig (241 barg)
Outlet: 0-30, 100 psig (2, 7 barg) or
subatmospheric to 30 psig (NPR only)

FLOW CAPACITY

$C_v = .04$

INTERNAL VOLUME

4.0 cc (6.19cc)

TEMPERATURE

-40°F to 150°F (-40°C to 66°C)

- 316L Stainless Steel construction
- Tied diaphragm regulator
- True metal-to-metal diaphragm seal assures high leak integrity



APR6 Series Pressure Reducing Regulator

OPERATING CONDITIONS

Inlet: 6000 psig (414 barg)
Outlet: 0-1000, 2000, 3000 and 6000
psig (69, 138, 207, 414 barg)

FLOW CAPACITY

$C_v = 0.05$

TEMPERATURE

-40°F to 150°F (-40°C to 66°C)

- Brass or 316L Stainless Steel construction
- 6000 psig service

Pressure Reducing Regulators



OPERATING CONDITIONS

Inlet pressure: 3,000 psig (204 barg) maximum
 Outlet pressure: 100, 150, 200, 250 psig (7, 10, 3, 14, 17 barg)

FLOW CAPACITY

$C_v = .02$

TEMPERATURE


-40°F to 150°F (-40°C to 66°C)

- 316L Stainless Steel and Brass construction
- Convoluted diaphragm provides outlet pressure stability with changes in flow
- Quick changeover control enhances safety

ChangeOver System with Alarm Package

Continuous Gas and Fluid Management with Alarm Package

Veriflo's ChangeOver System is a compact turnkey module designed for continuous gas and fluid management. The ChangeOver System combines the IR Series pressure reducing regulator with the NOVA Series diaphragm valves to create a compact gas delivery system for continuous gas or fluid applications

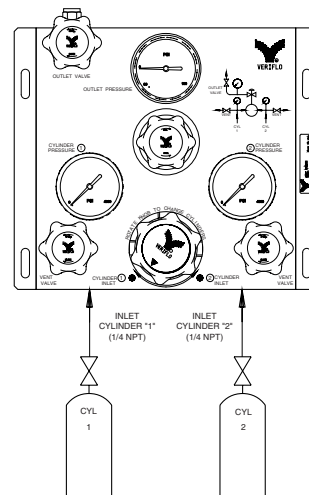

The Alarm Package for the ChangeOver System is

designed to give users both an audible and a visual indication of when it is time to change out cylinders. The alarm package is equipped with four channels to allow for the connection of multiple ChangeOver Systems.

The alarm signal is activated when either cylinder has dropped below a preset pressure. The signal is activated through two pressure switches which are located on each inlet valve.



HPR800 Series Pressure Regulator

OPERATING CONDITIONS

Inlet: 5000 psig (344 barg) @ 70°F (21°C)
 Outlet: 10-800, 20-1500, 50-2500 psig (.6-55, 1.3-103, 3.3-172 barg)

FLOW CAPACITY

$C_v = .02$

INTERNAL VOLUME

6.5 cc

TEMPERATURE

-40°F to 150°F (-40°C to 66°C)

- Brass or 316L Stainless Steel construction
- Suitable for gas cylinder applications



HIR100 Series Pressure Regulator

OPERATING CONDITIONS

Inlet: 3000 psig (207 barg)
 Outlet: 1-15, 30, 2-75 and 5-150 psig (.07-1, .07-2, .14-5, .34-10 barg)

FLOW CAPACITY

$C_v = 0.131$

INTERNAL VOLUME

9.30 cc


TEMPERATURE

-40°F to 150°F (-40°C to 66°C)


- Brass or 316L Stainless Steel construction
- Excellent low pressure setability
- Large diaphragm area for minimal pressure drop

Pressure Reducing Regulators

Two Stage



This device reduces an inlet pressure to an outlet pressure in two stages. The design is two single-stage regulators in series in one body. This device is preferred where there is a potential for large inlet pressure variations. Gas cylinders are the most common example of this application.

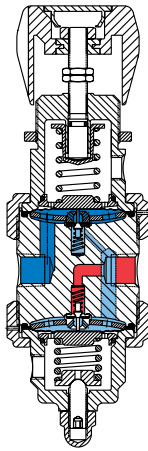

- ▶ Supply Pressure
- ▶ Medium Pressure
- ▶ Outlet Pressure



735TDR Series Two Stage Tied Diaphragm Regulator

OPERATING CONDITIONS

Inlet: 3500 psig (241 barg)
Outlet: 0-30, 100
(2, 7 barg) adjustable

FLOW CAPACITY

$C_v = .04$

INTERNAL VOLUME

7.3 cc


TEMPERATURE

-40°F to 150°F (-40°C to 66°C)


- 316L Stainless Steel construction
- Two-stage tied diaphragm regulator
- Adjustment range spring may be replaced without breaking the diaphragm seal to the body and exposing the wetted area to contamination
- True metal-to-metal diaphragm seal assures high leak integrity
- For gas cylinder applications

Back Pressure Regulators

Back Pressure Regulator



In contrast to controlling downstream pressure with a pressure reducing regulator, the back pressure regulator is used to control upstream or back pressure. This device operates like a sensitive, externally adjustable relief valve.

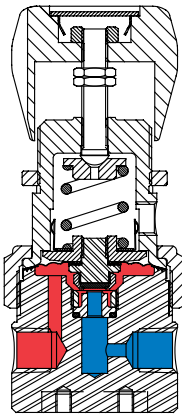

- ▶ Control Pressure
- ▶ Outlet Pressure



(Shown with Optional Aluminum knob)

ABPI Series Back Pressure Regulator

OPERATING CONDITIONS

Control Pressure: 0-25, 50, 100,
250, 500 psig (0-1.7, 3.5, 7, 17.2,
35 barg)

FLOW CAPACITY

$C_v = 0.3$ (optional 0.1 and 0.06)

INTERNAL VOLUME

5.9 cc

TEMPERATURE

Flow Media: -40°F to 400°F
(-40°C to 204°C)

- 316L Stainless Steel, Monel® or Hastelloy C-22® construction
- Low internal volume
- Meets NACE standard MR0175
- Atmospheric corrosion resistant



BPR50 Series Back Pressure Regulator

OPERATING CONDITIONS

Control Pressure:
100-1200 and 200-2000 psig
(6.8-8.3 barg and 13.8-38 barg)

FLOW CAPACITY

$C_v = 0.45$

INTERNAL VOLUME

5 cc

TEMPERATURE

-40°F to 150°F (-40°C to 66°C)

- 316L Stainless Steel
- 2000 psig service



ABP3 Series Back Pressure Regulator

OPERATING CONDITIONS

Control Pressure:
0-5, 30, 60 psig (0-.3, 2, 4 barg)

FLOW CAPACITY

$C_v = 0.3$ (optional 0.1 and 0.06)

INTERNAL VOLUME


13.8 cc

TEMPERATURE


Flow Media: -40°F to 150°F
(-40°C to 66°C)

- 316L Stainless Steel
- Large diaphragm for extra sensitivity

3Way Diaphragm Valve



These are on/off devices with no packing, o-rings or bellows in the flow stream. Available in Air Operated or Manual actuation. The 3-Way's metal-to-metal seal of the Elgiloy® diaphragm to the Stainless Steel body achieves outstanding seal integrity to atmosphere. This eliminates stem leakage and prevents contamination of the sample stream.



▶ Inlet

▶ Outlet



Nova 3Way AOP
Air Operated Diaphragm Valve


OPERATING PRESSURE
Vacuum to 500 psig (34.5 barg)

FLOW CAPACITY
 $C_v = .15$ (Typical)

INTERNAL VOLUME
2.11 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)
PCTFE (formerly Kel-F 81®)
-40°F to 250°F (-40°C to 121°C)

VespeI®



- Compact size
- High cycle life
- Diaphragm is only moving part in wetted area



Nova 3Way Manual
3Way Manual Diaphragm Valve

OPERATING PRESSURE
Vacuum to 3500 psig (241 barg)

FLOW CAPACITY
 $C_v = 0.15$ (Typical)

INTERNAL VOLUME
2.11 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)
PCTFE (formerly Kel-F 81®)
-40°F to 250°F (-40°C to 121°C)

VespeI®

- Compact size
- High cycle life
- Diaphragm is only moving part in wetted area



Nova 3Way Block & Bleed
Block & Bleed Diaphragm Valve

OPERATING PRESSURE
Vacuum to 80 psig (5.5 barg)

FLOW CAPACITY
 $C_v = 0.15$ (Typical)


INTERNAL VOLUME
2.11 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)
PCTFE (formerly Kel-F 81®)
-40°F to 250°F (-40°C to 121°C)

VespeI®



- Compact size
- High cycle life
- Diaphragm is only moving part in wetted area



Nova Series
Standard Features - All Models

OPERATING PRESSURE
Vacuum to 3500 psig (241 barg) except NOVA AOP

FLOW CAPACITY
 $C_v = .14$

INTERNAL VOLUME
Less than 1.0 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)

- Clean for O₂ service
- Low internal volume
- 316L Stainless Steel or Brass construction
- Metal to metal diaphragm seal to environment for leak integrity
- No packing, O-rings, springs or bellows in wetted area
- Diaphragm is only moving part in wetted area



NovaAOP
Air Actuated Diaphragm Valve

OPERATING PRESSURES
Vacuum to 250 psig (AOP1 NC, AOP3 NC) or 500 psig (AOP2 NC, AOP NO)


MINIMUM ACTUATION PRESSURE
40 psig min (AOP3 NC) and 65 psig min (AOP1 NC) @ 250 psig line pressure. 75 psig (AOP2 NC) and 50 psig (AOP NO) @ 500 psig line pressure.

- Air operated pressure piston style actuator
- High cycle life
- NC: Normally closed (3 options)
- NO: Normally open

Diaphragm Valve



These are on/off devices with no packing, o-rings or bellows in the flow stream. Available with multiple-turn handwheel, quarter-turn or air-operated actuators. Ideal for eliminating fugitive emissions in instrument systems.



▶ Inlet

▶ Outlet



**Nova Handwheel
Manual Diaphragm Valve**

OPERATING PRESSURE
Vacuum to 3500 psig (241 barg)

FLOW CAPACITY
 $C_v = .14$

INTERNAL VOLUME
Less than 1.0 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)

- Low internal volume
- No O-rings in wetted areas
- Clean O₂ service
- Compact size
- High cycle life



**Nova I
Indicating Handwheel**

OPERATING PRESSURE
Vacuum to 3500 psig (241 barg)

FLOW CAPACITY
 $C_v = .14$

INTERNAL VOLUME
Less than 1.0 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)

- Low internal volume
- No O-rings in wetted areas
- Clean O₂ service
- Compact size
- High cycle life



**Nova L
Lever Valve**

OPERATING PRESSURE
Vacuum to 3500 psig (241 barg)

FLOW CAPACITY
 $C_v = .14$

INTERNAL VOLUME
Less than 1.0 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)

- Low internal volume
- No O-rings in wetted areas
- Clean O₂ service
- Compact size
- High cycle life



**944 Series
Diaphragm Valves**

OPERATING CONDITIONS
944L, 944S, 944I Vacuum to 3500 psig (241 barg)
944 AOP LP: Vacuum to 125 psig (8.6 barg)
944 AOP HP: Vacuum to 3500 psig (241 barg)

FLOW CAPACITY
944L: $C_v = .18$
944 AOP LP: $C_v = .25$
944 AOP HP: $C_v = .25$

INTERNAL VOLUME
2.18 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)

- “VeriClean”, Veriflo’s high purity type 316L VAR Stainless Steel
- Unique patented compression member which loads the seal uniformly without the need for threaded components or crimping operations
- Fully field serviceable seat can be replaced without special tools
- NO (normally open) or NC (normally closed) or metering actuators available
- Fully functional under all vacuum conditions



**NV55 Series
High Flow Diaphragm Valve**

OPERATING PRESSURE
Maximum: (AOP) 125 psig (98.6 barg), (Manual) 250 psig (17 barg)
Minimum: Vacuum


FLOW CAPACITY
 $C_v = .55$

INTERNAL VOLUME
3.15 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)

- Internally threadless
- Ideal for high flow applications
- Fully functional from vacuum to 125 psig for AOP valve and 250 psig for manual valves
- Diaphragm is only moving part in wetted area
- High cycle life (including corrosive service)

Check Valve



VC10 Series
Check Valve

BODY
Brass or 316L Stainless Steel


MAXIMUM WORKING PRESSURE
3000 psig (207 barg) Stainless Steel
2000 psig (138 barg) Brass

FLOW CAPACITY
 $C_v = 0.42$

OPERATING TEMPERATURE
-30°F to 550°F (-35°C to 287°C)

- Positive sealing at very Low differential pressure
- Viton® and Kalrez seal options

Relief Valve



VR7 Series
Relief Valve

BODY
Brass or 316L Stainless Steel

ADJUSTABLE RANGES
10-20, 20-100, 100-250,
250-550 psig (.6-1.4, 1.4-6.9,
7-17, 17-34 barg)


FLOW CAPACITY
 $C_v = 0.37$

OPERATING TEMPERATURE
30°F to 400°F (-35°C to 204°C)

- Choice of seal materials
- HEX body provides wrench flats
- Available with a variety of connection options

Excess Flow Valve

This valve is flow sensitive and will shut off if it senses an increased amount of flow above the specified set point. After shut off, it may be manually reset to continue operation.



▶ Inlet

▶ Outlet

FS190 Series

Excess Flow Shut-off Valve

MAXIMUM INLET PRESSURE
3500 psig (241 barg)

6 AVAILABLE FLOW RANGES
500 cc - 100 LPM

INTERNAL VOLUME
1.86 cc

TEMPERATURE
-10°F to 150°F (-23°C to 66°C)



- 316L Stainless Steel
- A non-attitude sensitive excess flow shut-off valve



928AOP Series
Pressure Reducing Air-Operated Valve

OPERATING CONDITIONS
Inlet: 3500 psig (241 barg)
Outlet: 350 psig (24 barg) with
2000 psig (138 barg) inlet pressure
and 80 psig (5.5 barg) actuator pressure -
Outlet pressure varies with inlet pressure
and actuator pressure

FLOW CAPACITY
 $C_v = .04$

INTERNAL VOLUME
1.54 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)

- Improves systems safety by lowering the inlet pressure to a safer working range



928AOPHP Series
High Pressure Air-Operated Valve


OPERATING CONDITIONS
Inlet: 3500 psig (241 barg)
(for oxygen: 2200 psig (170))
Outlet: Vacuum to 3500 psig (241 barg)

FLOW CAPACITY
 $C_v = .04$

INTERNAL VOLUME
1.54 cc

TEMPERATURE
-40°F to 150°F (-40°C to 66°C)

Flow Controller

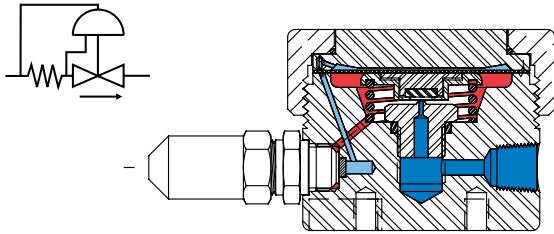

These are mechanical devices that control flow by maintaining a constant differential pressure across an orifice. They can be either upstream or downstream referenced.

- ▶ Metered Flow
- ▶ Down Stream
- ▶ Upstream

SC421 and SC423 Series
Precision Low Flow Controllers



MAXIMUM INLET PRESSURE
150 psig (10 barg)

FLOW RANGE
1 cc - 1000 cc/min
5 cc - 500 cc/min

TEMPERATURE
-40°F to 200°F (-40°C to 93°C)

- 316L Stainless Steel construction
- Upstream or downstream referenced
- Air sampling per EPA method TO-12 and TO-14
- Analyzer systems

LC221 and LC223 Series
Gas and Liquid Flow Controllers



MAXIMUM INLET PRESSURE
LC221: 3800 psig (262 barg)
LC223: 5000 psig (344 barg)

FLOW RANGE
LC221: Less than .1 scc/min - 1 LPM
LC223: 25 scc - 40 LPM

TEMPERATURE
-20°F to 200°F (-29°C to 94°C)

- 316L Stainless Steel construction
- Upstream or downstream referenced

SC423 XL Series
Precision Low Flow Controller



MAXIMUM INLET PRESSURE
2 psig

FLOW RANGE
3, 6, 10, 27 sccm

TEMPERATURE
-40°F to 200°F (-40°C to 94°C)

- 316L Stainless Steel construction
- Reliable precision flow control as low as 3 sccm
- Air sampling per EPA method TO-12 and TO-14
- Stable flows over a wide temperature band
- Stable flows as vacuum pressure changes downstream from 28 in/Hg to 5 in/Hg

Additional documentation and technical information regarding Veriflo Division's Instrument/Analyzer and Semiconductor/High Purity product lines is available in ".PDF" format via:


www.veriflo.com

New Product Spotlight

- IR6000 Series
- IR4000 Series
- NPR4000 Series
- AVR3 and AVR4 Series


Pressure Reducing Regulators

Single Stage



- HFR 900 Series
- MIR 700 Series
- APR3 Series
- 959 TDR Series
- APR66 Series
- ChangeOver System with Alarm Package
- HPR 800 Series
- HIR 100 Series


Two Stage



- 735 TDR Series

Back Pressure Regulators

Back Pressure Regulator



- ABP1 Series
- BPR50 Series
- ABP3 Series


Valves

Diaphragm Valve




- NOVA 3Way AOP
- NOVA 3Way Manual
- Nova 3Way Block & Bleed
- Nova Series
- Nova AOP
- Nova Handwheel
- Nova I
- Nova L
- 944 Series
- NV55 Series
- VC10 Series

Check Valve



Relief Valve




- VR7 Series

Excess Flow Valve

- FS 190
- 928AOP Series
- 928AOPHP Series

Flow Controllers

Vaporizing Regulator



- SC 421 and SC 423 Series
- LC 221 and LC 223 Series
- SC 423 XL

Veriflo Division On-line

Veriflo Division of Parker Hannifin features a comprehensive web site which includes detailed information on pressure regulators, diaphragm valves, and continuous gas management systems at the click of the mouse.

The site features downloadable product literature in .PDF files, archived pressed releases, trade show event information and general division information. Product literature buttons include viewable cross sectional drawings, flow curves and ordering information.



Product Literature binders can be ordered on-line by selecting the Literature Request button (located at the bottom of each web page throughout veriflo.com).

Visitors to www.veriflo.com can click the Applications Support button to ask detailed technical questions on the Veriflo Division's product line. Veriflo's Application Support team responds to all visitor's question within 24 hours.



Links to Parker's Instrumentation Group (www.parker.com/instrumentation) and IG Divisions web site can be accessed through www.veriflo.com. Parker's home page (www.parker.com) can also be accessed directly via veriflo.com



Parker Hannifin Corporation
6035 Parkland Blvd.
Cleveland, Ohio 44124-4141
Telephone: (216) 896-3000
Fax: (216) 896-4000
www.parker.com

Parker Hannifin Corporation

About Parker Hannifin Corporation

Parker Hannifin is a leading global motion-control company dedicated to delivering premier customer service. A Fortune 500 corporation listed on the New York Stock Exchange (PH), our components and systems comprise over 1,400 product lines that control motion in some 1,000 industrial and aerospace markets. Parker is the only manufacturer to offer its customers a choice of hydraulic, pneumatic, and electromechanical motion-control solutions. Our Company has the largest distribution network in its field, with over 7,500 distributors serving nearly 400,000 customers worldwide.

Parker's Charter

To be a leading worldwide manufacturer of components and systems for the builders and users of durable goods. More specifically, we will design, market and manufacture products controlling motion, flow and pressure. We will achieve profitable growth through premier customer service.

Product Information

North American customers seeking product information, the location of a nearby distributor, or repair services will receive prompt attention by calling the Parker Product Information Center at our toll-free number: 1-800-C-PARKER (1-800-272-7537). In Europe, call 00800-C-PARKER-H (00800-2727-5374).

The Aerospace Group is a leader in the development, design, manufacture and servicing of control systems and components for aerospace and related high-technology markets, while achieving growth through premier customer service.



The Climate & Industrial Controls Group designs, manufactures and markets system-control and fluid-handling components and systems to refrigeration, air-conditioning and industrial customers worldwide.



The Fluid Connectors Group designs, manufactures and markets rigid and flexible connectors, and associated products used in pneumatic and fluid systems.



The Seal Group designs, manufactures and distributes industrial and commercial sealing devices and related products by providing superior quality and total customer satisfaction.



The Hydraulics Group designs, produces and markets a full spectrum of hydraulic components and systems to builders and users of industrial and mobile machinery and equipment.



The Filtration Group designs, manufactures and markets quality filtration and clarification products, providing customers with the best value, quality, technical support, and global availability.



The Automation Group is a leading supplier of pneumatic and electromechanical components and systems to automation customers worldwide.



The Instrumentation Group is a global leader in the design, manufacture and distribution of high-quality critical flow components for worldwide process instrumentation, ultra-high-purity, medical and analytical applications.





WARNING

FAILURE, IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

Offer of Sale

The items described in this document are hereby offered for the sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the "offer of Sale".

Veriflo Division