


Process Temperature: -50°C / 200°C (-58°F / 390°F).  
 Head Material: 316 S/S or polypropylene standard.  
 Probe Material: 316 S/S.  
 Element: PT100, 3 wire lead.  
 Leadwires: AWG22, Teflon insulated standard.  
 Element Accuracy @ 0°C (32°F): ±0.12%.

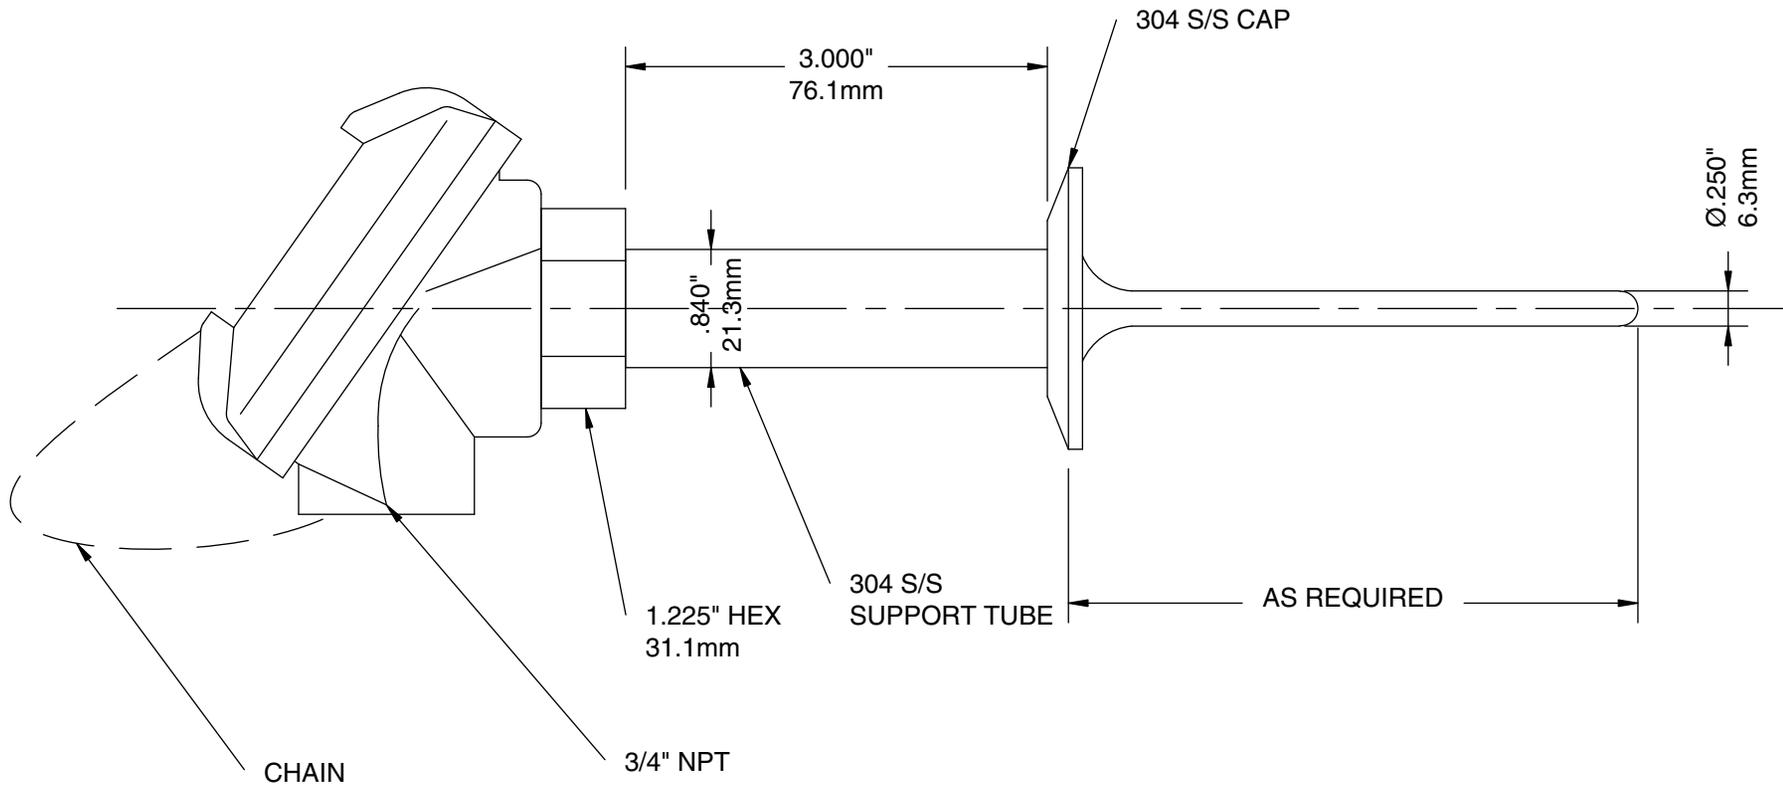

WINTERS INSTRUMENTS

DRAWN BY: E. H.

CHECKED BY:

ENG. APPROVAL:

APPROVED BY:

ALL DIMENSIONS IN INCHES

TOLERANCES  
(unless otherwise stated)

Fractional: 1/64"

Decimal: 0.06"


REVISION No. & DATE: APR. 15, 2002

TITLE:

RTD, 3A SANITARY

DRAWING NO: RTD-3A

Process Temperature: -50°C / 200°C (-58°F / 390°F).  
 Head Material: 316 S/S or cast aluminum standard.  
 Probe Material: 316 S/S.  
 Element: PT100, 3 wire lead.  
 Leadwires: AWG22, Teflon insulated standard.  
 Element Accuracy @ 0°C (32°F): ±0.12%.

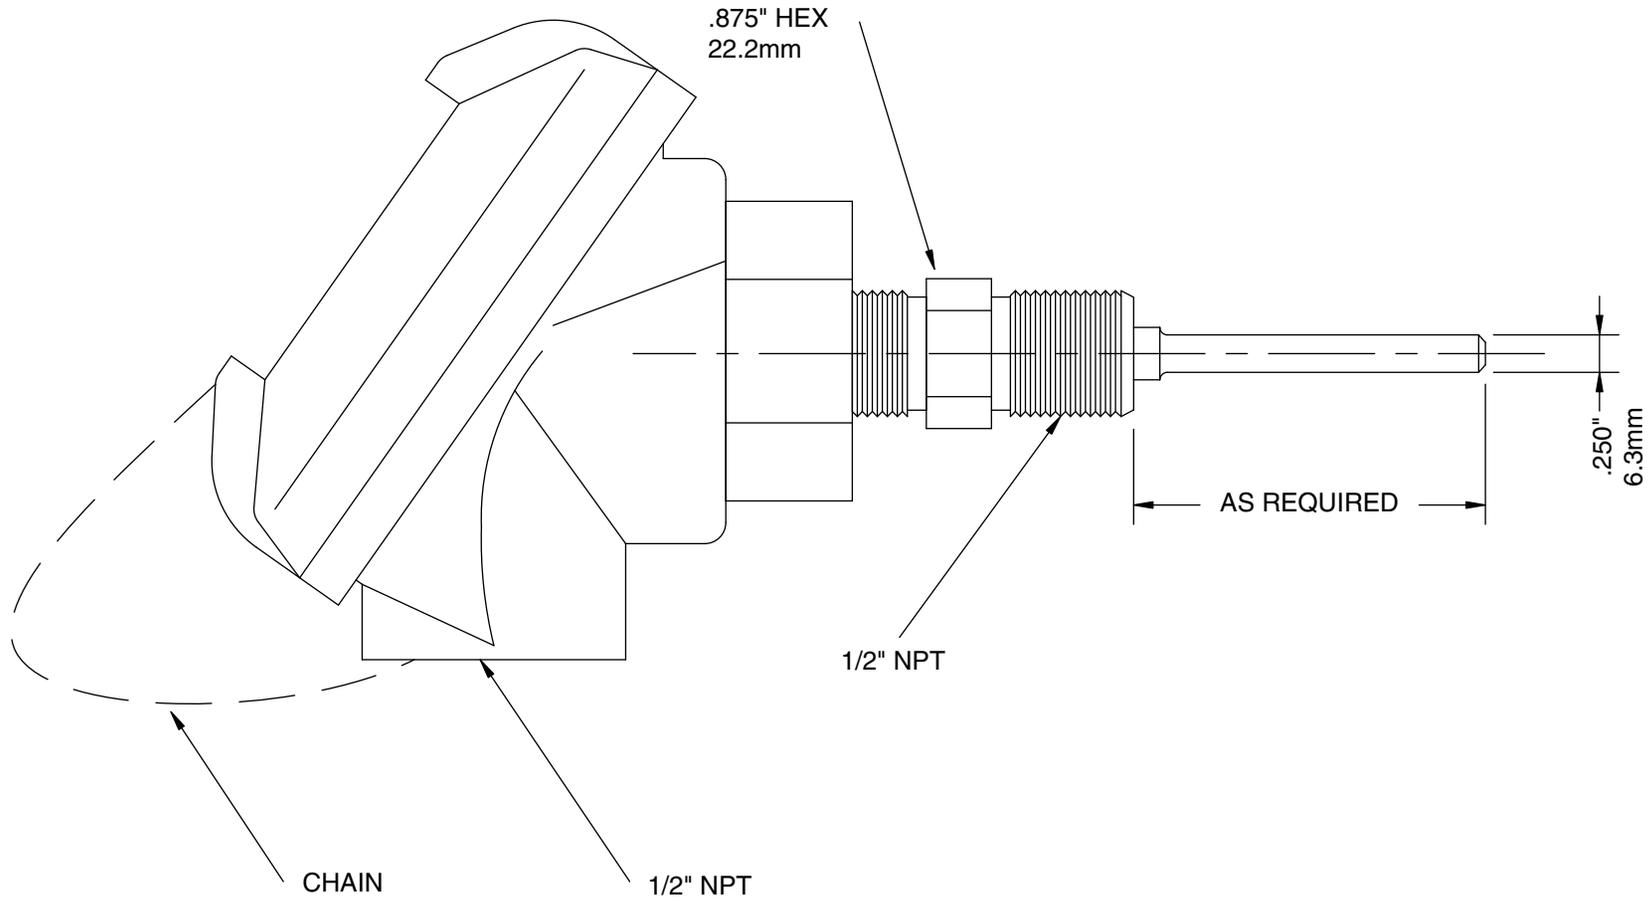

WINTERS INSTRUMENTS

DRAWN BY: E. H.

CHECKED BY:

ENG. APPROVAL:

APPROVED BY:

ALL DIMENSIONS IN INCHES

TOLERANCES  
(unless otherwise stated)

Fractional: 1/64"

Decimal: 0.06"

REVISION No. & DATE: APR. 15, 2002

TITLE:

RTD, INDUSTRIAL

DRAWING NO: RTD-IND